

DESCRIPTION


The P-906MK2 Power Amplifier delivers up to 60 watts of output power. The power amplifier has an input port to accept one plug-in module.

SPECIFICATIONS


Type	Power amplifier
Power Requirement	AC mains, 120 V, 60 Hz
Power Consumption	100 W
Output Power	60 W RMS
Power Band Width	(D) 20 ~ 20,000 Hz, 0.5% THD (T) 50 ~ 20,000 Hz, 0.5% THD
Frequency Response	(D) 20 ~ 20,000 Hz, ±1 dB (T) 20 ~ 15,000 Hz, ±1 dB, (T) 20 ~ 20,000 Hz, +1 dB, -3 dB
T.H.D	0.01% at 1 kHz, rated output
Inputs	One Input Port : Port accepts any input module expect T-01. One Direct Input * Use of direct input prohibits use of modular input port.
Input Sensitivity /Impedance	Input Port : 100 mV or 1000 mV (switchable)/10 kΩ Direct Input : 100 mV or 1000 mV (switchable)/10 kΩ
Outputs(T)=Transformer (D)=Direct	Main (T) : 8 Ω, 25 and 70 volts, balanced Main (D) : 4 Ω, unbalanced
Output Regulation(1kHz)	(D) Less than 0.5 dB, no load to full load (T) Less than 1.0 dB, no load to full load
S/N Ratio(Band Pass 20 ~ 20,000 Hz)	Input level switch in 0 dBV (1000 mV) position : 108 dB Input level switch in -20 dBV (100 mV) position : 90 dB
Controls	1 Input gain control 1 Input level switch 1 Power ON/OFF switch 1 Low-Cut switch
Indicators	1 Power LED, 1 Protect LED, 1 Signal LED, 1 Normal LED, 1 Peak LED
Protection	Self-protection, with AC fuse (inside)
Connectors	Input : Card-edge connector and screw-terminal strip Output : Screw-terminal strip AC outlet : 3-pin grounding type AC power cord/plug : SJT, 3-prong type
Temperature Range	-10°C ~ +60°C (12°F ~ 140°F)
Finish	Black
Dimensions(W×H×D)	420(16.54") × 99.1(3.90") × 358(14.09") mm
Weight	9.1 kg (20.06 lb.)
Accessory	Volume control cover (YA-920).....1
Option	Rack mounting bracket (MB-25B)

APPEARANCE


Rear View

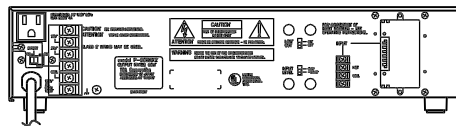


Top View

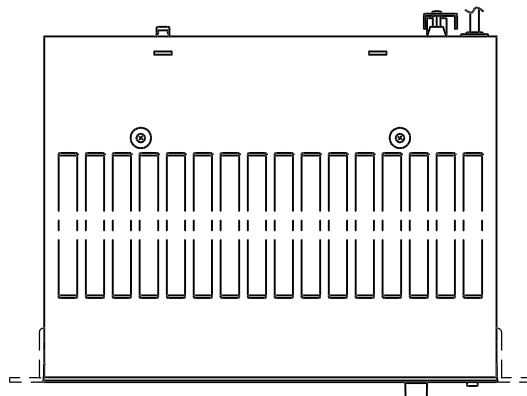

Side View

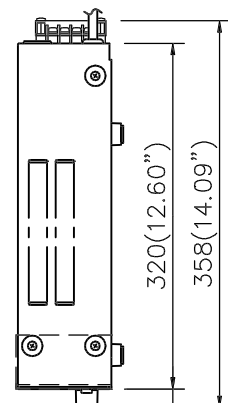

Front View

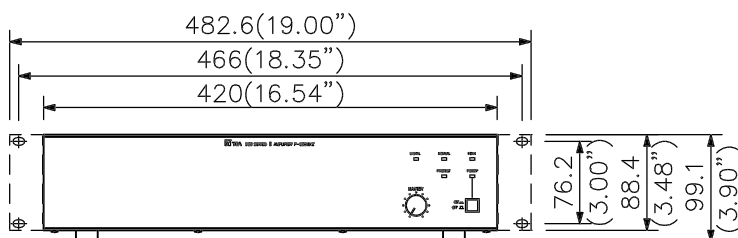

UNIT:mm SCALE:1/7