

DESCRIPTION


The E-232 has two 2/3 octave 14-point equalizers. It can be mounted in a 19" equipment rack (1-unit size).

SPECIFICATIONS

※0 dB=0.775 Vrms

Power Requirement	120 V AC 60 Hz
Power Consumption	11 W
Input	+4 dB※ 30 kΩ (GAIN : 0 dB), unbalanced, phone-jack and screw terminal
Output	+4 dB※ 1 kΩ, unbalanced, phone-jack and screw terminal
Max. Input Level	+32 dB (GAIN : -12 dB)
Max. Output Level	+20 dB
Frequency response	+1 dB, -2 dB (20 Hz to 20,000 Hz)
Total Harmonic Distortion	Less than 0.01 % at 1,000 Hz (rated output)
Equalization Center Frequency	40 Hz, 63 Hz, 100 Hz, 160 Hz, 250 Hz, 400 Hz, 630 Hz 1 kHz, 1.6 kHz, 2.5 kHz, 4 kHz, 6.3 kHz, 10 kHz, 16 kHz
Control Equalizer Sliders	Boost : +12 dB, +6 dB Cut : -12 dB, -6 dB (switchable)
Gain Range	±12 dB
Highpass Filter	-12 dB / oct (Adjustable cutoff frequency 15 Hz to 300 Hz)
Hum and Noise (IHF-A)	Less than -98 dB※ (EQ : ON, HPF : 15 Hz, GAIN : 0 dB, all sliders at 0 position)
Finish	Front panel : Aluminium, black Case : steel, black
Dimensions(W×H×D)	483 (19.01")×46 (1.81")×311 (12.24") mm
Weight	3.8 kg (8.38 lb.)

APPEARANCE

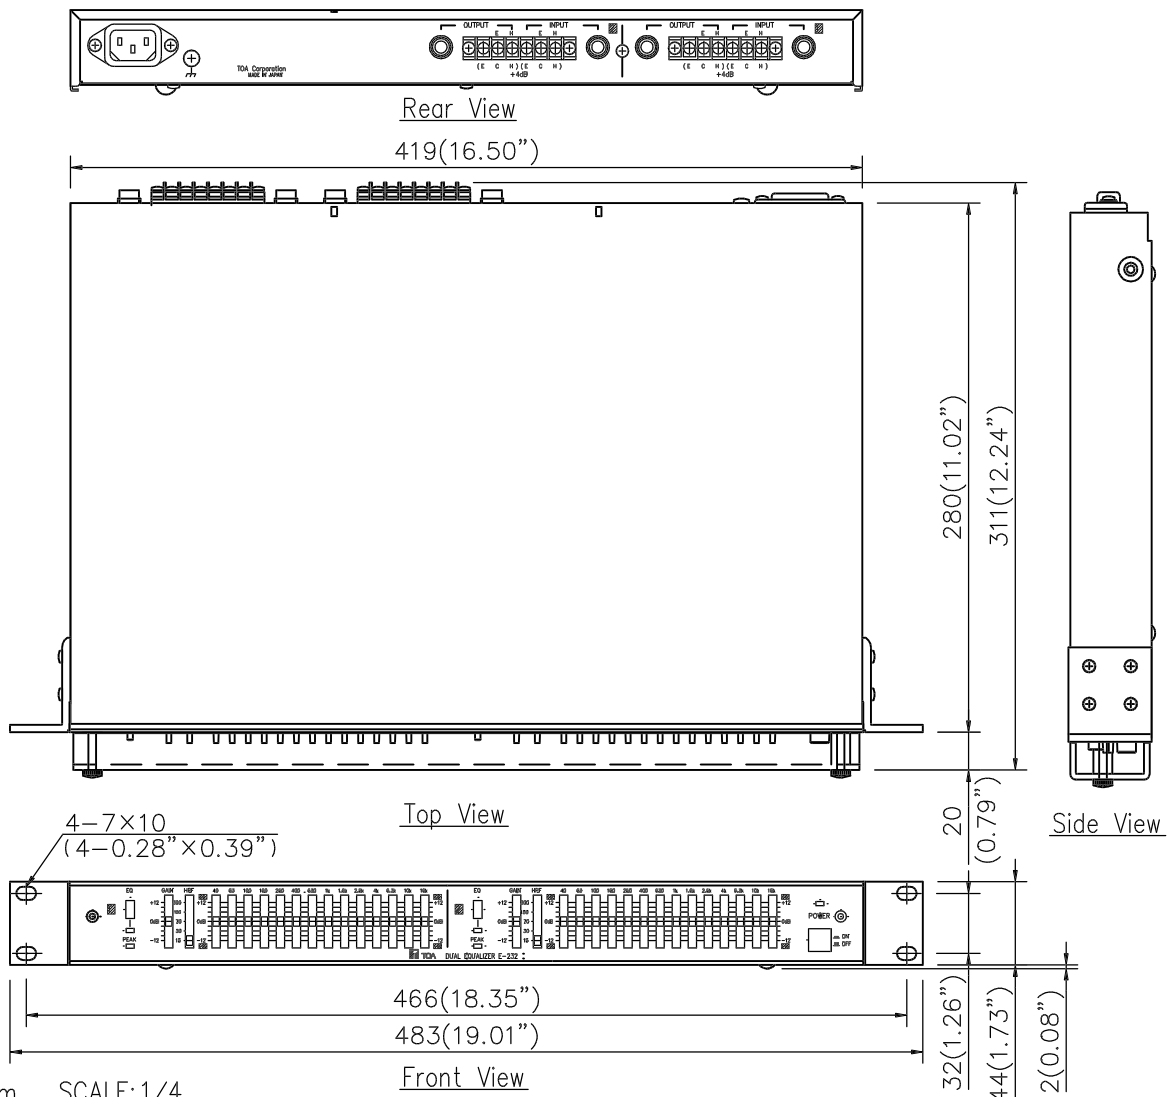

UNIT:mm SCALE:1/4