

■DESCRIPTION


The M-03P is a microphone input module to be used in conjunction with the 900 series components and other TOA's equipment. It has an unbalanced microphone input with $\phi 6.3$ (1/4") phone jack connector, and gain and high and low cut filter tone controls.

■SPECIFICATIONS

* 0 dB=1 V


Power Source	24 V DC (supplied from the main frame)
Current Consumption	9 mA
Input Sensitivity	-50 dB* (rated output: -20 dB*), adjustable: -62 to -42 dB*
Input Impedance	50 k Ω , unbalanced
Frequency Response	20 Hz - 20 kHz ± 1.5 dB
Distortion	0.05 % or less (1 kHz, output: 0 dB*)
Noise Level	-86 dB* (20 Hz - 20 kHz BPF), input equivalent noise: -116 dB*
Gain	22 - 42 dB
Tone Control	100 Hz: 0 to -10 dB, 10 kHz: 0 to -10 dB
Connector	$\phi 6.3$ (1/4") Phone jack (3P)
Dimensions	35 (W) x 78 (H) x 88 (D) mm (1.38" x 3.07" x 3.46")
Weight	Max. 65 g (0.14 lb)

■APPEARANCE

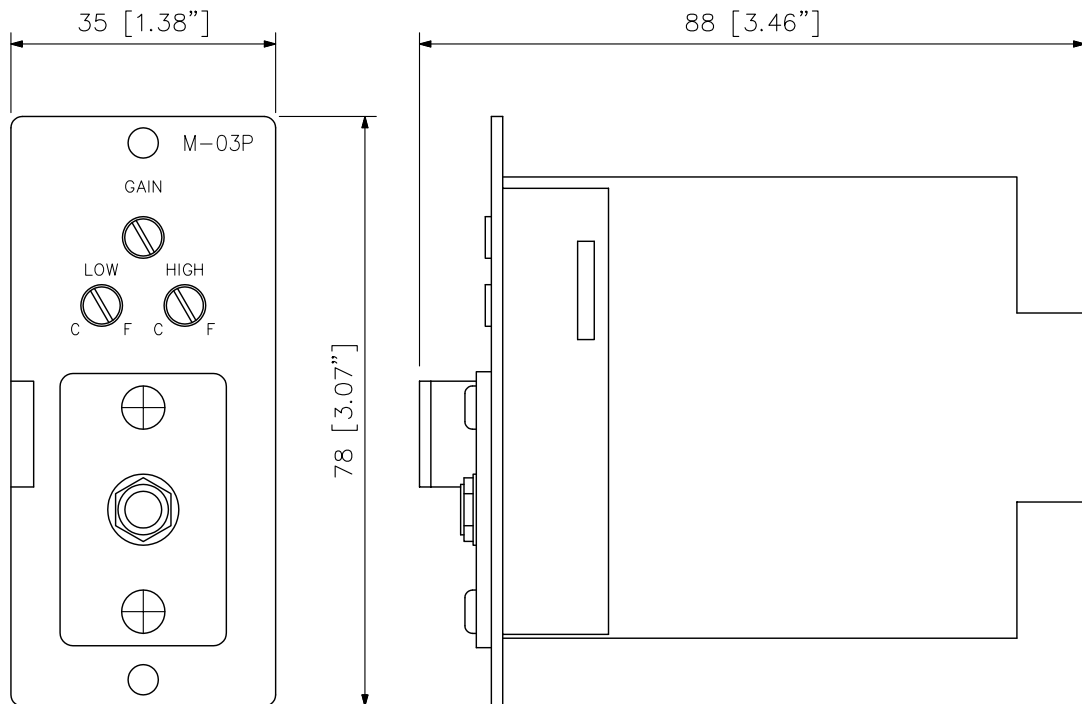

Front View

Side View



Connection Diagram

UNIT:mm SCALE:1/1