

MONITOR SPEAKER

ME-120 Full Range Speaker System



Rear View

ME-160 2-Way Speaker System



Rear View

DESCRIPTION

TOA's new ME-160 and ME-120 monitor speakers are designed to meet nearfield monitoring applications in control rooms. They feature high quality accurate and low-colouration sound to satisfy the various requirements for monitor speakers for professional or consumer requirements.

FEATURES

- The ME-160 and ME-120 produce a spacious, deep soundstage with outstanding ambience retrieval.
- Better monitoring achieved with excellent low-level dynamics and resolution.
- Ideal speakers for nearfield monitoring applications with flat frequency response and high resolving power allow use as ideal sound quality evaluation tool for professionals.
- Able to position near video monitors and CRT displays thanks to shielded construction technique utilized.
- Easy to mount in different locations using special mounting hardware.
- The ME-160 and ME-120 are packed as mirror-imaged pairs in single cartons.
- Cabinet construction utilizes MDF (Medium Density Fiberboard) and interior bracing to achieve maximum rigidity with exterior wood veneer finish.
- Speaker terminals are gold-plated and also accept dual banana jacks.
- Acoustically transparent grilles use black jersey material and are removable.
- Installation is easy and optional metal hardware provide flexible mounting choices.
- Speakers can also be suspended from a wall or ceiling.


ME-160

- The ME-160 woofer is made of a newly developed composite cone material with natural fibers and resin for achieving ideal stiffness and producing optimal piston motion.
- Dome tweeter utilizes soft fabric (Tetoron) and an acrylic-based damping process for smooth, uncoloured and extended high frequencies.
- Crossover features specially selected components for producing excellent transient response while reducing any potential smearing and phase problems.
- High efficiency speaker design achieves a flat frequency response over the useable frequency range.
- Cabinet uses a bass reflex cabinet configuration and is tuned to a frequency of 50Hz for accurate low frequency reproduction within design parameters.


ME-120

- More compactly configured speaker is ideal for quality monitoring in small spaces.
- Incorporates a single high performance full-range driver unit that performs as a point source for ideal dispersion characteristics.
- Speaker features a copper ribbon edge-wound speaker voice coil for accurate low frequency energy as well superb response well up into the midrange. The speaker's high efficiency design is able to produce a magnetic flux density of 1.3T.
- Bass reflex cabinet design tuned to 75Hz.


SPL vs Frequency

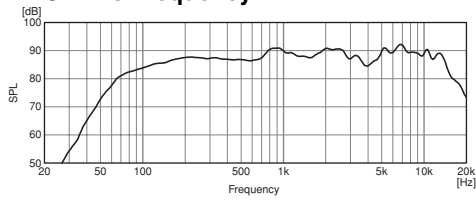

Beamwidth vs Frequency

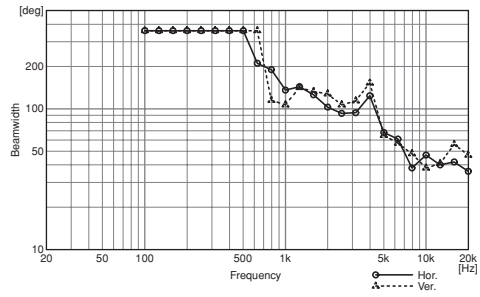


Directivity Factor vs Frequency

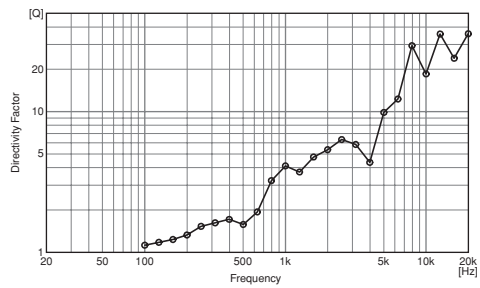





Polar Response

horizontal

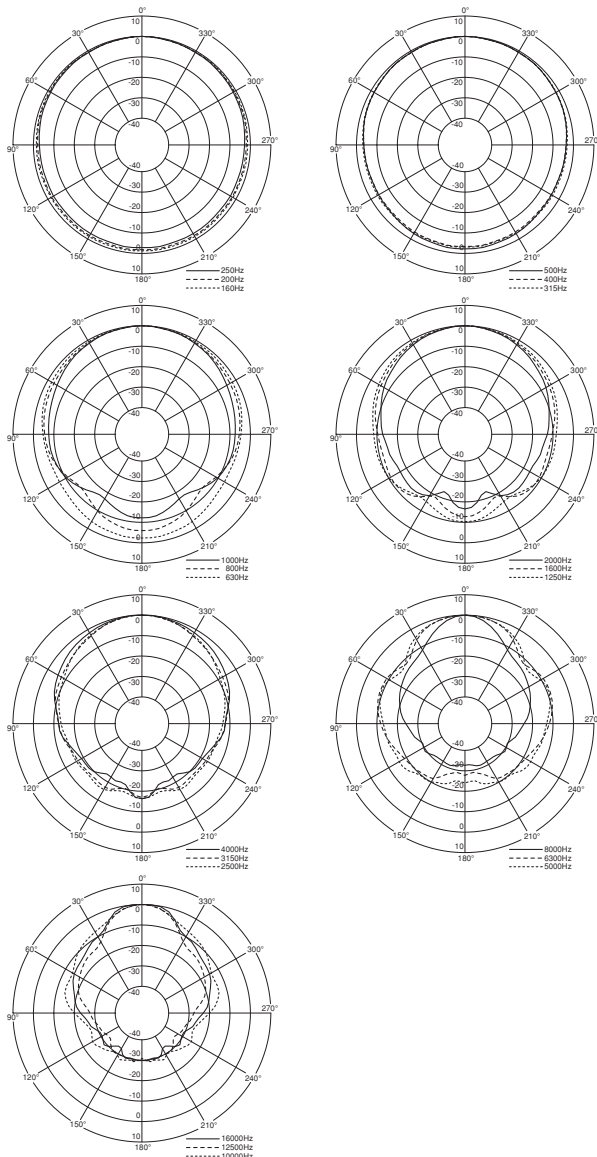


vertical

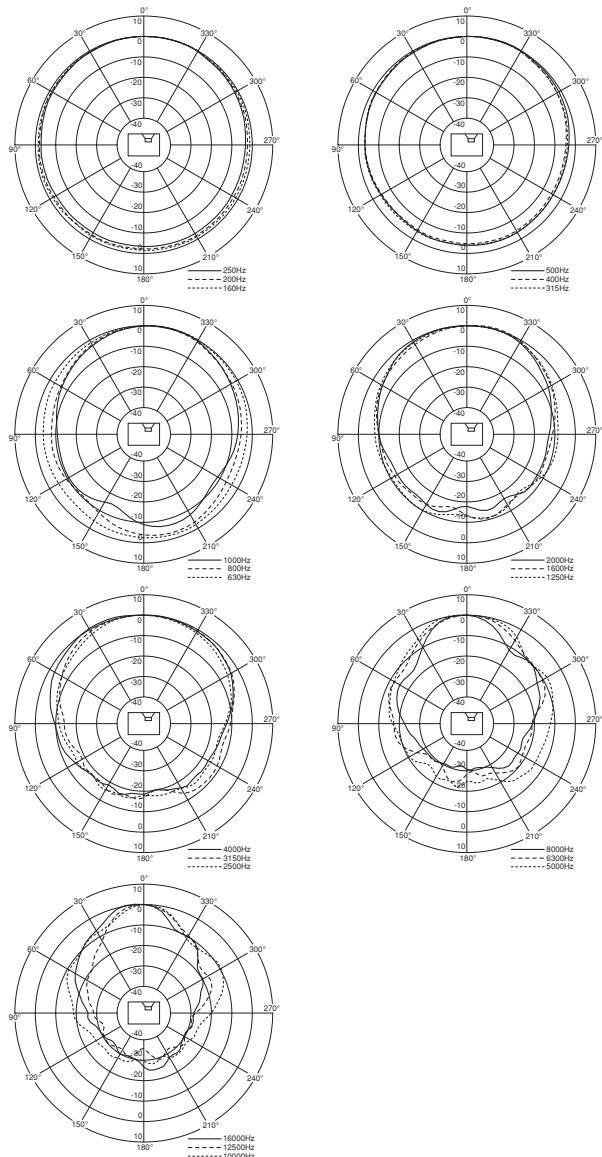

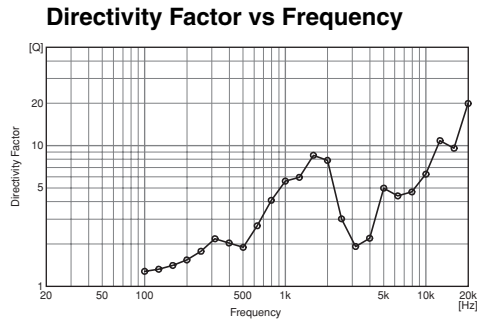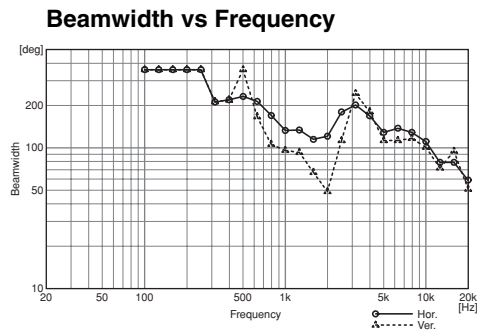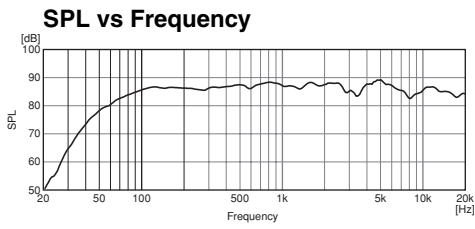


Polar Response

horizontal

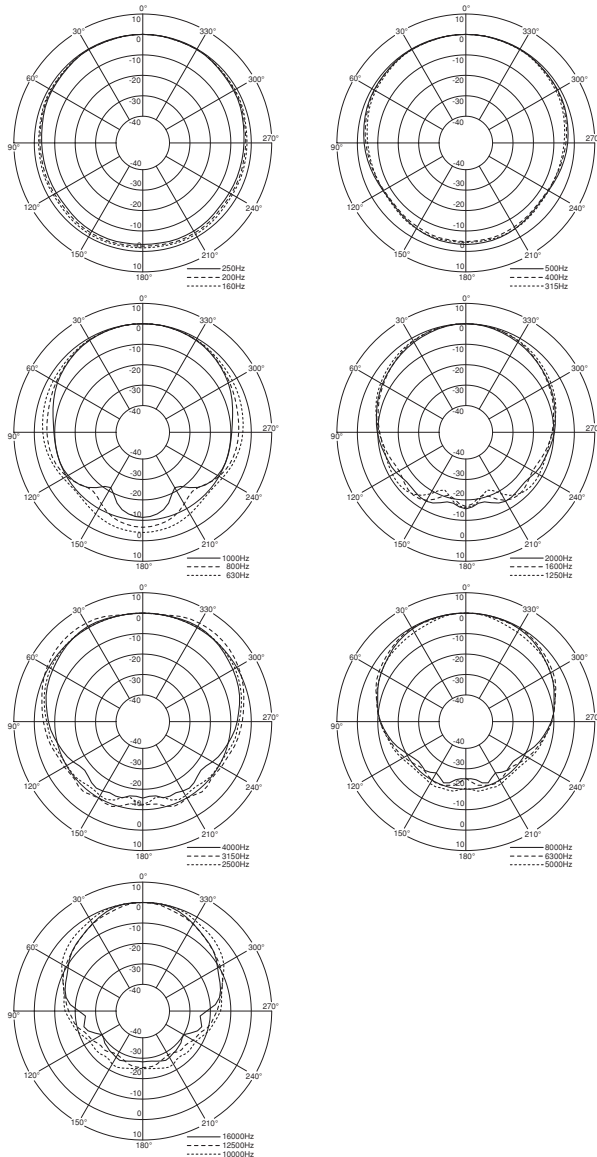

vertical

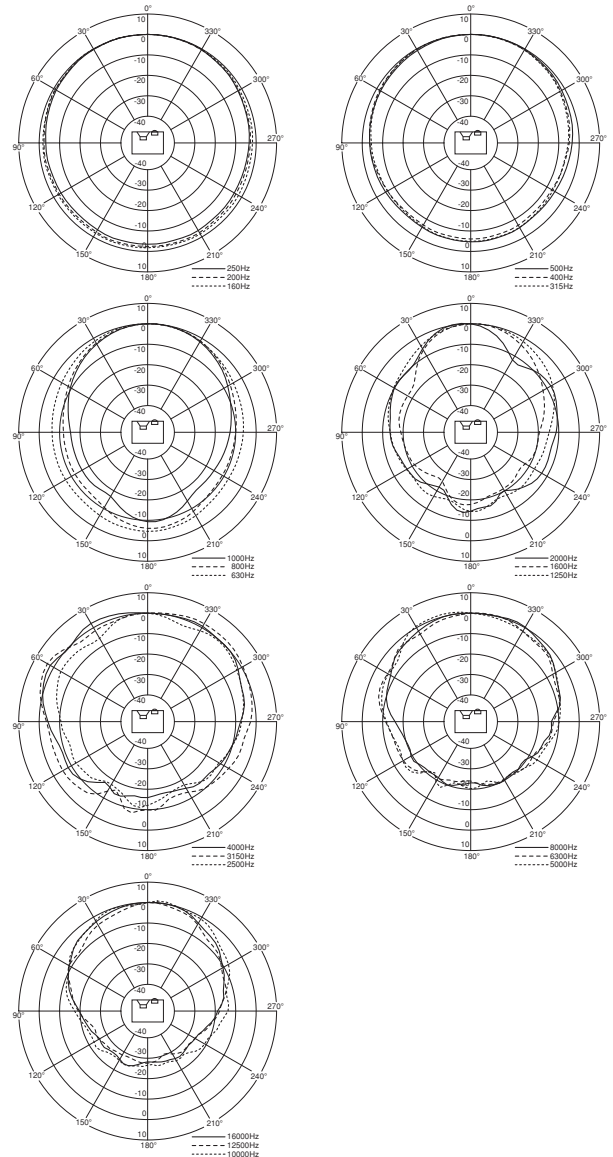

SPECIFICATIONS

	ME-120	ME-160
Enclosure	Bass reflex type	
Power Handling Capacity	Continuous pinknoise: 50W, Continuous program: 150W	
Rated Impedance	6 ohms	
Sensitivity	88dB (1W, 1m)	
Frequency Response	60 – 18,000Hz	50 – 20,000Hz
Crossover Frequency	—	2,000Hz
Speaker Component	16cm cone-type (magnetically shielded)	16cm resin-impregnated natural fiber cone woofer (magnetically shielded)
	—	2.5cm soft-dome type (magnetically shielded)
Input Terminals	Screw terminals (compatible with a dual-banana plug), gold plated	
Finish	Enclosure: MDF, black, paint Front grill: Cloth, black	
Dimensions	170 (W) × 264 (H) × 194 (D) mm	216 (W) × 376 (H) × 244 (D) mm
Weight	3.6kg (per unit)	7.5kg (per unit)
Mounting Brackets (option)	WCB-12, WCB-31, CMB-31	WCB-31, CMB-31

Note 1: Use screws inserted into on enclosure to mount the optional speaker holder.

Note 2: Both the ME-160 and ME-120 do not incorporate protective circuitry which could affect sound quality.

Care must be taken to pair the speakers with amplification within the recommended range. In no circumstances should the speakers be used for public address applications.

OPTIONS



WCB-12
Wall/Ceiling Mounting Bracket




WCB-31
Wall/Ceiling Mounting Bracket




CMB-31
Ceiling Mounting Bracket

APPEARANCE AND DIMENSIONAL DIAGRAM

ME-120

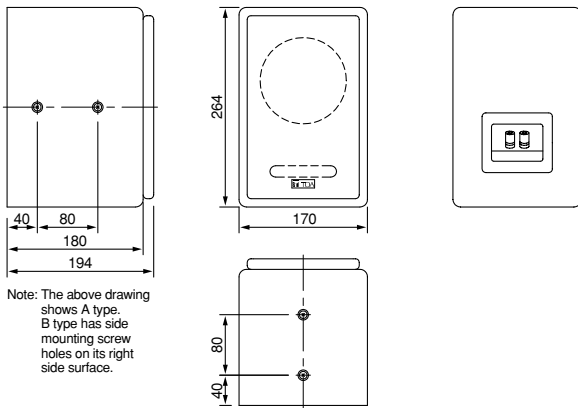

ME-160

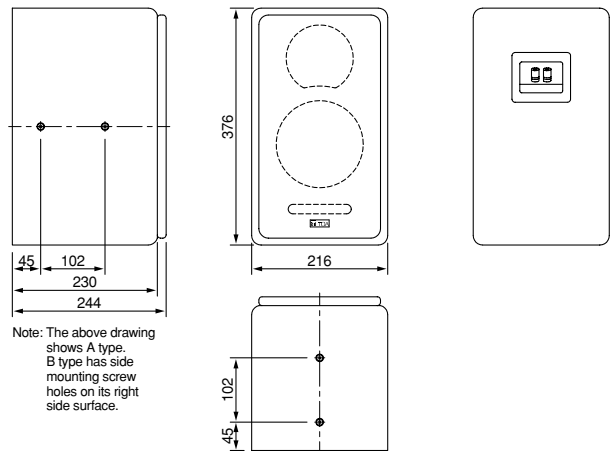

Unit: mm