

■ SPECIFICATIONS

Diversity Reception	AC mains (supplied AC-DC adapter must be used)
Frequency Range	506 - 538 MHz (*1), UHF
Channel Selectable	Up to 16 channels (depending on region)
Sensitivity	10uV at 45dBA S/N
Squelch(SQ)	Tone SQ, Carrier SQ, Noise SQ
Audio Frequency Response	50 - 15000Hz
Audio Output Level (Maximum)	S4.10-RXA Balanced (XLR socket) : 16dBu Un-balanced (1/4" jack socket) : 10dBu
Power Supply	11-18 VDC 300mA
Dimensions	215(W) x 39(H) x 102(D) mm (excluding antenna and BNC)
Weight	480g
Option	Mounting bracket kit: MB-S4RX (MB-S4RX-5)


(*1)

Band	Frequency
M	506 - 538 MHz, UHF


(*2)

Version	AC Adapter
R (US)	120 V AC , 60Hz

■ APPEARANCE

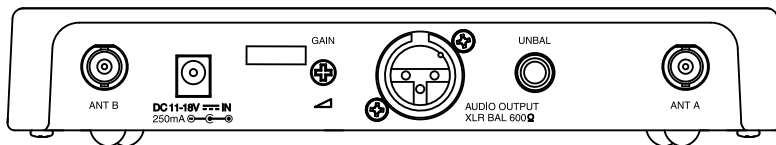

Rear View

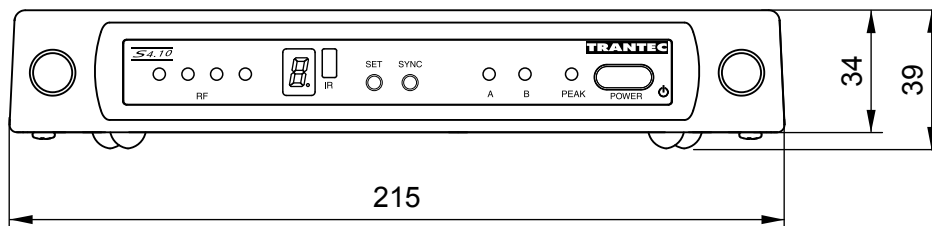

Front View

Side View

