

■DESCRIPTION

The D-937SP is a 1 stereo channel line digital input module designed for use with the D-901 Digital Mixer, etc. With the use of this module, digital signals can be input, permitting direct connection of the D-901 Digital Mixer to equipment having a digital output. Owing to the built-in sample rate converter, the module can handle signals of various sampling frequencies. When this module is used, one of four stereo inputs is selected for output to the D-901. Input selection can be performed at the front panel, by PC software or through a remote control module.


■SPECIFICATIONS

Input	Stereo 1 channel line (Selectable one of four inputs) 0.5 V (p-p), 75 Ω, Coaxial RCA jack × 2 Square optical connector × 2
Applicable Format	S/PDIF (2 channel multiplexed)
Sampling Frequency	32 - 48 kHz
Finish	Panel: Pre-coated steel plate, black, 30% gloss
Dimensions	35 (W) × 119.5 (H) × 178.4 (D) mm
Weight	130 g


■APPEARANCE



Top View

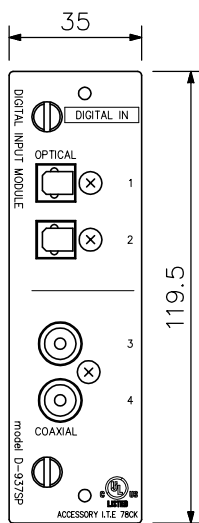

Front View

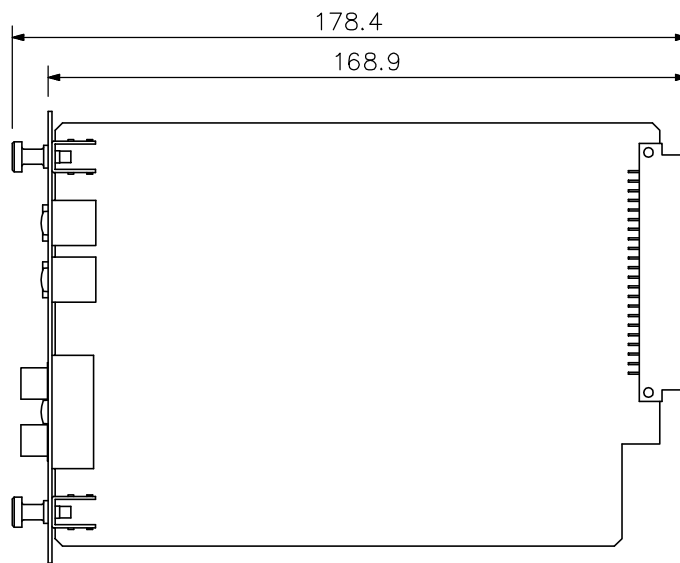

Side View

UNIT:mm SCALE:1/2