


■DESCRIPTION

The E-06R is a controller module for H-3, H-3WP to be used in conjunction with the 900 series modular mixers and amplifiers (MK2 and A series) .

■SPECIFICATIONS

| | |
|-----------------------------------|-----------------------------|
| Power Source | 24 V DC |
| Current Consumption | Less than 25 mA |
| Input | 1 V, 100 kΩ, RCA pin jack |
| Output | 1 V, 1 kΩ, RCA pin jack |
| Noise Output (20 Hz – 20 kHz BPF) | Less than 50 μV |
| Distortion | Less than 0.05% |
| Dimensions | 35 (W) × 78 (H) × 88 (D) mm |
| Weight | 55 g |

■APPEARANCE

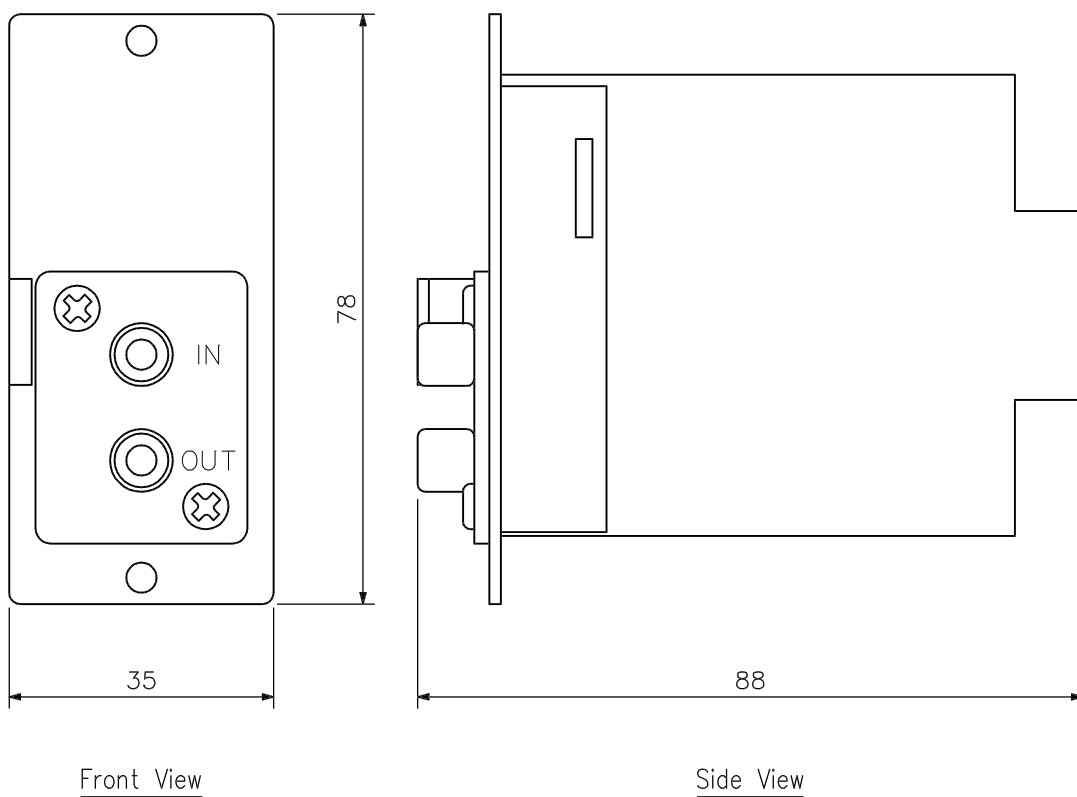

UNIT:mm SCALE:1/1