



BS-1030


Music/Paging Speakers



Tastefully designed to harmonize with building interiors.

Features


- 2-Way bass reflex speaker
- Cost-effective high power PA box speaker
- Aesthetically pleasing design blends in modern buildings and other facilities, such as boutique, restaurant and amusement park
- Low impedance (8Ω) or high impedance (100V/70V) selectable by rotary switch
- Splashproof construction in compliance with IPX4

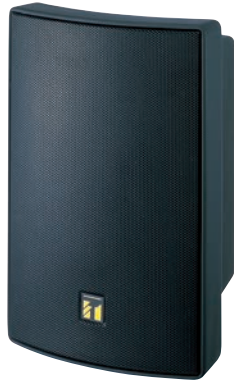

Specifications

	BS-1030B/W
Rated Input (100V line)	30W
Rated Impedance	8Ω/100V line: 330Ω, 500Ω, 200kΩ, 670Ω, 1kΩ, 2kΩ 70V line: 170Ω, 250Ω, 330Ω, 500Ω, 1kΩ
Sensitivity (1W, 1m)	90 dB
Frequency Response	80 – 20,000 Hz
Speaker Component	12cm dynamic cone-type + dome-type
Finish	Enclosure: ABS resin, black or white Grille: Surface treated steel plate, black or white, powder coating
Dimensions	196 (W) x 290 (H) x 150 (D) mm 7.7 (W) x 11.4 (H) x 5.9 (D) in
Weight	2.5kg 5.5lbs
Option	SP-410 Wall Mount Bracket

Included Supplement Bracket Configurations

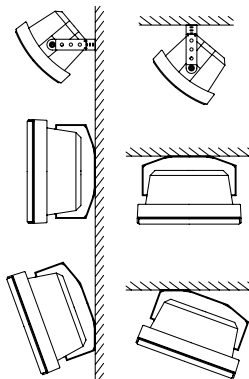

SP-410 Wall Mounting Bracket



Configurations

